



## Cable Socks and Swivels

### Heavy Duty Underground Cable Socks - Tesmec

- Suitable for single and multiple core underground cables
- Longer socks give extra pulling force - larger surface area gives better grip
- Steel wires with protective finish and alloy ferrule offering durability and longevity




Scan or Click to View or Download Grip Inspection Selection & Application



Part No.	Conductor OD Ø (mm)	Length (mm)	UTS (kN)	Wt (kg)
GCL180	46-60	1600	50	2.0
GCL194	61-80	1800	80	2.5
GCL200	81-100	2000	100	3.0
GCL210	101-140	2000	100	3.5

### Heavy Duty Large Eye Cable Socks - Tesmec

- Ideal for underground and overhead work
- Suitable for Transmission & Distribution AL, CU & ST
- Colour coded plastic bands at ferrule to identify range and capacity
- Steel wires with protective finish and alloy ferrule
- Long mesh length provides additional gripping surface area

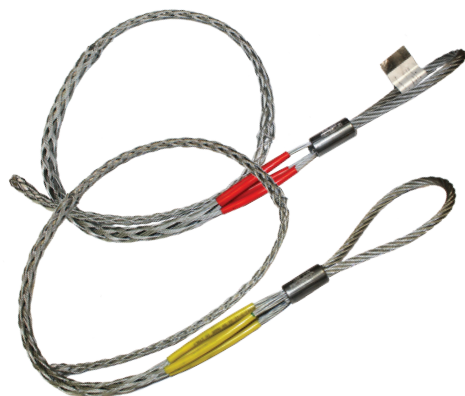

Part No.	Suitable Swivel	Conductor OD Ø (mm)	Colour	UTS (kN)	Mesh Length (mm)	Wt (kg)
GCT001	GGT001	8 - 17	Yellow	35	1100	0.7
GCT010	GGT010	17 - 29	Red	85	1360	1.3
GCT020	GGT020	29 - 38	Green	130	1470	2.1
GCT030	GGT020, GGT030	38 - 50	Black	180	1820	2.7

### Double Head Socks - Tesmec

Part No.	Conductor OD Ø (mm)	Colour	UTS (kN)	OAL (mm)	Wt (kg)
GCT500	8 - 17	Yellow	35	2680	1.15
GCT510	17 - 29	Red	85	3240	2.3
GCT520	29 - 38	Green	130	3540	3.6
GCT530	38 - 50	Black	180	4240	4.8

### Standard Swivels - Tesmec

- Swivels for connecting pulling rope to cable sock
- For Overhead or Underground application
- Made from high tensile galvanised and corrosion protected steel
- Chamfered edges allowing smooth passing through rollers or conduit
- Special design can bear high radial loads. Thrust bearings designed to avoid torsion strain accumulation

Part No.	Max Rope Size OD (mm)	Break Load (kN)	Diameter OD (mm)	Overall Length (mm)	Wt (kg)
GGT001	10	70	28	106	0.3
GGT010	13	110	40	143	0.9
GGT020	18	220	54	184	2.1
GGT030	24	360	60	234	3.4
GGT040	28	750	77	322	8.2

