




Power Hub Anchors

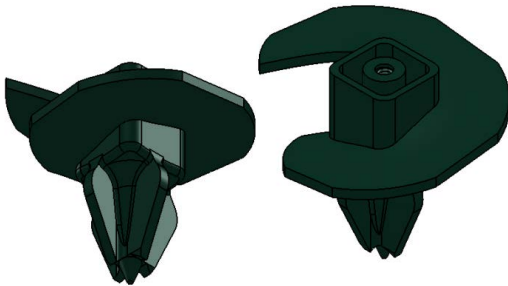

Utility Power Hub Anchors

- Used for tough soils where the solid hub anchors cannot be installed
- One piece cast steel hub for increased torque and bending strength
- Four flute hub to break up tough soils
- Install 57mm (2 1/4") with standard power installed anchor installing tool
- All of the power installed anchor rods are used with the Turbo Drive® anchor
- Standard Turbo Drive® anchors are used with 9.5mm (3/8") helix
- Heavy duty Turbo Drive® anchors are used with 12.7mm (1/2") helix

Standard 57mm (2-1/4") Turbo Drive™ Socket Drive 13.6kNm Ultimate Installing Torque 9.5mm (3/8") Helix for Standard Installing Tool

Part No	Helix Diameter	Tapped for Rod Size	Weight
TD225-64M24	150mm	19 - 25mm (3/4 or 1")	3.8kg
TD225-84M24	200mm	19 - 25mm (3/4 or 1")	4.5kg
TD225-104M24	250mm	19 - 25mm (3/4 or 1")	6.2kg



Heavy Duty 57mm (2-1/4") Turbo Drive™ Socket Drive 13.6kNm Ultimate Installing Torque 9.5mm (1/2") Helix; for Standard Installing Tool

Part No	Helix Diameter	Tapped for Rod Size	Weight
TDH225-114M24	300mm	19 - 25mm (3/4 or 1")	9.75kg
TDH225-134M24	355mm	19 - 25mm (3/4 or 1")	12.5kg

