


Web Strap Ratchet Hoists

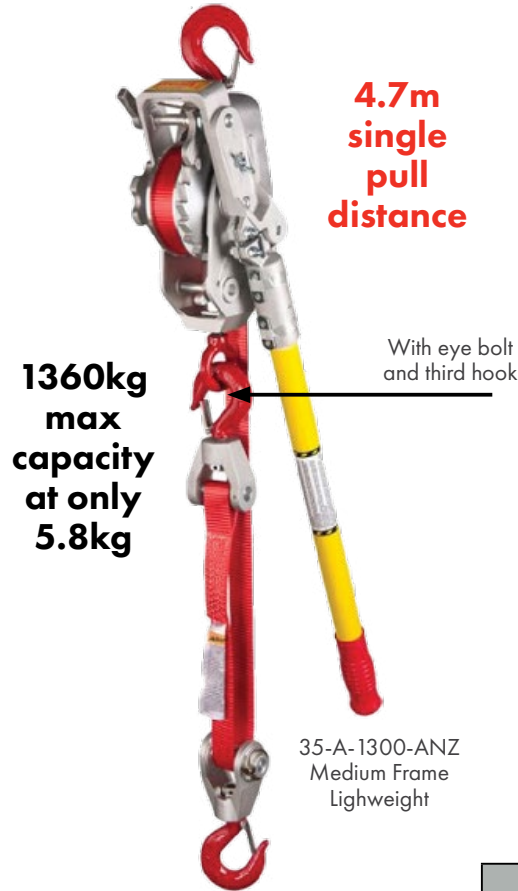

Lug-All Web Strap Hoists

- Positive Load Holding in all Environments – Interlocking pawl mechanism, no load brakes to slip or foul
- Ease of Operation – Self lubricating bearings throughout housing and on pulley assures smooth operation
- Stress Link – Signals operator by breaking replaceable link before overloading hoist
- Double Flanged Drum – Prevents web strap from coming in contact with ratchet teeth
- Open Frame Construction – Ease of cleaning, greasing and visual inspection
- All Lug-All's meet the current (2005) ANSI/ASME B30.21-2005 standard for "manually lever operated hoists"

Convertible Models

- Allows easy change from double to single fall without a floating third hook
- Weighs less and has more headroom than standard medium frame models

LUG-ALL®

Lug-All Standard & Convertible Models

Part No	Frame Size	Feature	Capacity	Single Pull		Double Pull			Strap Length	Handle Length	Net Weight
				Single Pull Distance		Capacity	Double Pull Distance				
				Min	Max		Min	Max			
2-A-1300-ANZ	Small	Standard	450kg	0.40m	2.9m	900kg	0.53m	1.3m	3.05m	760mm	4.6kg
2-CA-ANZ	Small	Convertible	680kg	0.51m	2.1m	1360kg	0.46m	1.1m	3.48m	760mm	4.3kg
25-I	Small	Hotstick Ring	680kg	0.42m	2.25m	1360kg	0.53m	1.03m	2.40m	510mm	4.8kg
35-A-1300-ANZ	Medium	Lightweight	680kg	0.48m	4.7m	1360kg	0.68m	2.2m	4.80m	760mm	5.8kg
40-A-ANZ	Medium	Lightweight	907kg	0.48m	2.8m	1814kg	0.64m	1.2m	3.05m	910mm	6.0kg

2-A-1300-ANZ
Small Frame



25-I
Small Frame



2-CA-ANZ
Small Frame
Convertible

