


SPP Corner & Curve Cable Rollers

Corner & Curve Rollers

- Solid construction trench roller guides
- Provisions to peg units down and join units together
- Supplied with two internal bearings
- Zinc plated finish
- Aluminium or Nylon rollers available
- Replacement rollers available




Part No	Dimensions	Angle	Bend Radius	No. of Rollers	Rollers	Max. Cable OD
SPP-2D-4C90	700mmL x 170mmW	90°	350mm & 600mm	4	Aluminium or Nylon	150mm
SPP-2D-3C45	550mmL x 170mmW	45°	500mm	3		150mm
SPP-2D-4C45	800mmL x 170mmW	45°	900mm	4		150mm

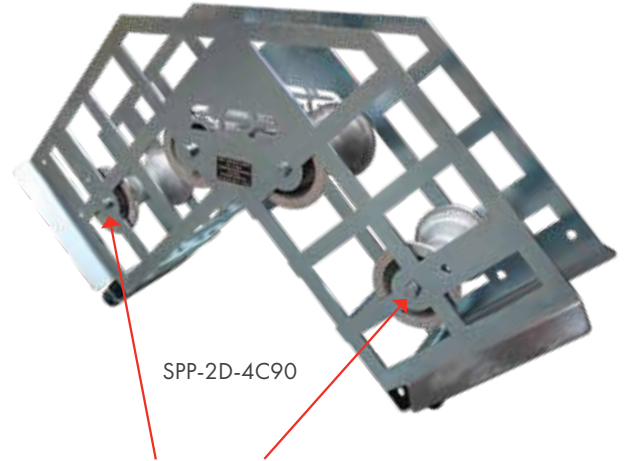

SPP-2D-4C90

Versatile 90° four corner roller with dual radius capabilities by simply moving bolts to other positioned holes on frame

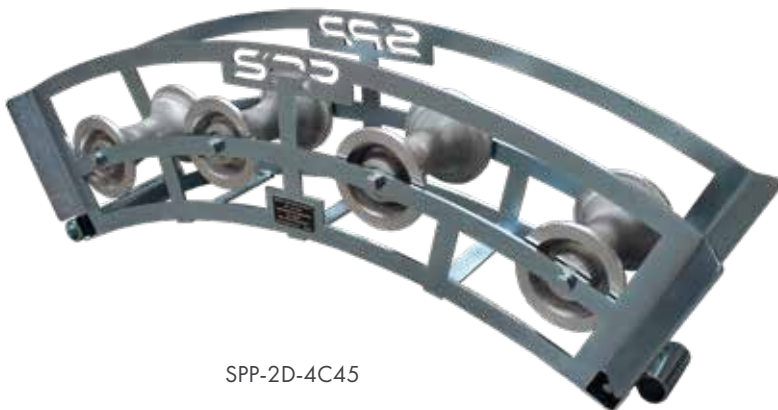

SPP-2D-4C45



SPP-2D-3C45

Corner Rollers

- Ground cable laying corner roller/ trench roller
- Corner guide trench roller
- 1 x Horizontal & 2 x Vertical 60mmOD rollers
- Easily pinned together
- 1000kg/1T WLL

Part No.	SPP-2B-TCR	SPP-2B-TCR-IN
Description	Standard	Inverted
Max. Payload	1000kg	
Dimensions	450mmL x 300mmW x 310mmH	
Weight	12kg	13.8kg

SPP-2B-TCR



SPP-2B-TCR

SPP-2B-TCR-IN