



Battery Powered Hot Stick Tester - Hastings

Part No. 7707




Test fibreglass sticks on site when there is no power present.

Utilising a 2,500 volt output, the meter is calibrated to indicate the leakage values that would be present if 75KV were applied to a 300mm section of the fibreglass for the wet test and 100KV per foot for the dry test

Features

- Push Button switch for wet or dry tests and a dual range scale which gives the operator leakage current values in micro amps
- Portable and lightweight for ease of use
- Meets OSHA 1910.269
- The tester is designed to protect the operator while in use
- Bright Digital Display with easy to read PASS/FAIL
- The tester comes complete with a padded carrying case and instructions.
- A test bar is also provided to ensure the tester is working properly
- Battery or USB operation

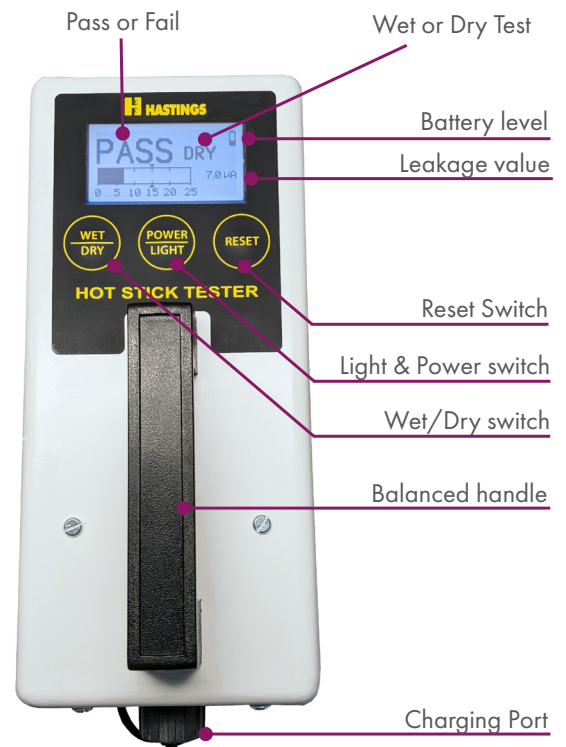


Part No.	Operating Temperature	Battery Life	Charging time	Dimensions (mm)	Wt (kg)	3m USB Charging Cord Part No.	Replacement Test Bar Part No.
7707	0-40°C	6 Hours	1.5 Hours	195 x 100 x 94	2.4	A30431	A30212

Included Equipment



3m Charging cord

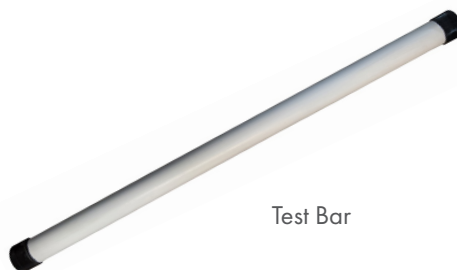

Test Bar



Storage Case