



Quality Tools, Equipment & Line Materials for the Energy Industry.



## Conductor Diameter Gauges


Part No. CG-430-AU

HDPE slide gauge quickly & easily identify conductor OD

- Designed for Australian AL, CU & ACSR conductors
- Measure Live Conductors
- For conductors 4.0 - 30mm Ø
- Suits universal sunrise fitting
- Can be used with a shotgun stick

**Reduce Incorrect Conductor Identification**

Part No.	Dimensions (mm)	Weight (kg)
CG-430-AU	104 (W) x 287 (L) x 10 (D)	0.26

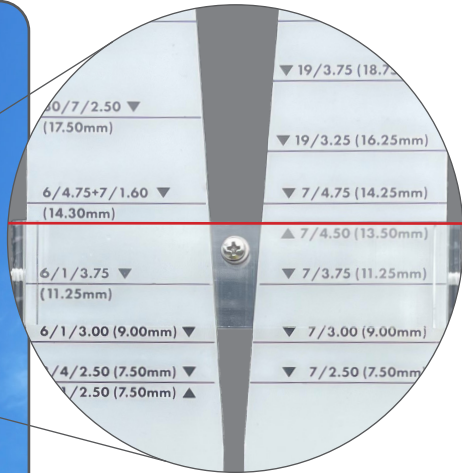

Top of the Clear Plastic Slide indicates Conductor size  
In this case 7/4.50 (13.5mm)

**Utilize the CU side to add your own conductor sizes**



## AL, CU & ACSR - Common Conductor Sizes

Part No. CG-EQL Series

Quickly & easily identify common overhead electrical distribution conductor or wire sizes in AL, CU & ACSR. Markings include conductor name, stranding and overall diameter.

- Hole in base for use with a shotgun stick and hanging storage
- Imperial and metric sizes included
- Precision machined from lightweight aluminium alloy



Part No.	Conductor Range	Dimensions (mm)	Wt (kg)
CG-EQL-ALCU	Copper 7/.064 – 4.87mm to 19/2.75 – 13.8mm Aluminium Locust – 7/.093 - 7.08mm to Taurus - 19/4.75 - 23.80mm	257 (L) x 91 (W) x 14 (D)	0.75
CG-EQL-ACSR	ACSR Quince - 5.25mm to Wolf – 18.13mm	209 (L) x 91 (W) x 14 (D)	0.65