




## Temporary Earth Stake - TEN

Hand drive the Earth stake for temporary earthing applications.

### Features

- Slide hammer drive
- T-Handle lock screw secures sliding shaft for safety, transport and storage (TENW001)
- Non-slip rubber hand grips (TENW001)
- 16mm Stainless steel rod
- Heavy duty top bash cap
- Chiseled tip for easy driving
- Drive rod at a safe working height, minimise risk of back injury
- No pinch points - internal hammer design
- 730mm to attachment point

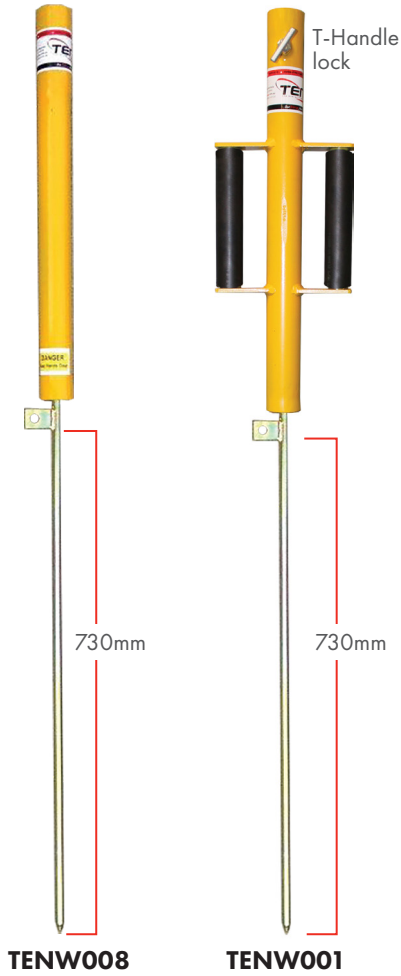

Earth attachment



Earth clamp attachment



Part No.	Length OAL Extended/Retracted (mm)	Attachment Point (mm)	Rod OD (mm)	Wt (kg)
TENW001	1820 / 1340	730	16	6
TENW008				5

## iTOOLco

## Earth Rod Drivers - iTOOLco

### Part No. Various


Safely drive 9.5mm, 12.7mm, 14mm, 16mm and 19mm Earth rods into the ground in under a minute with iTOOLco's Ground Rod Dawg™. Once the rod is driven down far enough the tool can be used to hammer from top to finish the driving.

### Features

- Hardened tool steel construction for long life
- Multiple size rods can be driven
- SDS Max driver bit for positive connection and secure driving of rods



Drive the rod down to a comfortable height

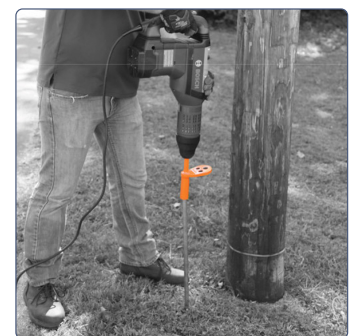

Then complete the driving by hammering from the top

Part No.	Description	Earth Rod Size (mm)	Driver shaft
GRD01	Earth Rod Driver	12.7 to 19	SDS Max
GRDXL34		19	Demo Hammer
GRDXL01		25	