



Cable Pulling Grips - Slingco

For the installation of overhead conductors and cable in conduits, ducts and trenches

Slingco, a world-leading manufacturer & supplier of cable grips.

Founded more than 40 years ago, Slingco remains a family-owned business but has evolved into an expert design and manufacturing operation, producing high quality cable grips, assemblies and more

Slingco operates out of regional bases in the UK and USA, supplying products around the world, making heavy-duty cable and conductor installation a whole lot easier.

MU TYPE - HIGH STRENGTH CABLE GRIP

KEY FEATURES

- ◆ Heavy Duty multi-weave construction
- ◆ Used for heavy duty pulling
- ◆ Suitable for Bare Steel, AL & CU Conductor
- ◆ Colour coded for easy identification




Features

- The MU Type grip's triple-weave construction is ideal for heavy loads
- Cable grips are color coded for ease of identification
- Hand-Woven with quality Galvanized Steel
- Perfect for stringing overhead transmission and distribution lines and heavy load pulls
- Ideal for new or old conductors
- The flexible eye connects with line pulling swivels for trouble free pulling applications

Grip Specifications

Part No. Colour Code	Conductor Range (mm)	Amokabel Conductor	A (mm)	B (mm)	C (mm)	D (mm)	Breaking Load kg/kN
ZCS1710	6-12	CCSX25	7	102	965	720	3,170/31.09
ZCS1711	12-19	CCSX62	8	127	1263	978	4,760/46.68
ZCS1712	19-25	CCSX159	9	156	1537	1162	6,395/62.71
ZCS1713	25-32	-	13	165	1909	1470	11,340/111.21

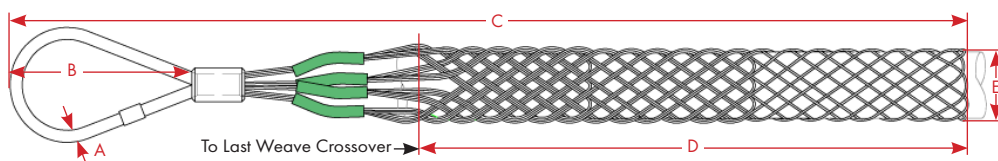

Important Note: Ensure fitting instructions are followed and always apply the recommended Steel Band for maximum grip of the conductor

“See Selection Chart Over”



Cable Pulling Grips - Slingco

Conductor Stranding	OD mm	Type	Conductor Name	Grip Part No., Colour Code & OD Range	Swivel Part No.
3/2.75	5.93	ST/GZ	--	ZCS1710 6-12mm OD	GGT001
3/2.75	5.93	ST/AC	--		
7/2.00	6.00	SC/GZ	--		
7/2.25	6.75	AL	Jupiter/Baron		
7/2.50	7.50	AL	Diamond/Chlorine/Leo		
6/1/2.50	7.50	ACSR	Almond		
6/1/.093	7.50	ACSR	Gopher		
3/4/2.50	7.50	ACSR	Raisin		
7/2.75	8.25	SC/GZ	Emerald/Fluorine/Libra		
7/3.00	9.00	AL	Apple		
6/1/3.00	9.00	ACSR	Ferret		
6/1/.118	9.00	ACSR	Sultana		
4/3/3.00	9.00	ACSR	Sultana/Swimming		
7/3.25	9.75	SC/GZ	--		
7/3.40	10.20	SC/GZ	--		
7/3.75	11.30	AL	Helium		
6/1/3.75	11.30	ACSR	Banana		
4/3/3.75	11.30	ACSR	Walnut/Tennis		
6/1/.144	11.30	ACSR	Mink		
CCSX25	12.00	ACS/CC	Amokabel CCSX25		
7/4.50	13.50	AL	Jade/ Hydrogen /Mercury	ZCS1711 12-19mm OD	GGT001
7/4.75	14.30	AL	Moon/Iodine/Jasper		
6/1/4.75	14.30	ACSR	--		
6/4.75 - 7/1.60	14.30	ACSR	Cherry		
6/.186 - 7/.062	14.30	ACSR	Dog		
CCSX62	15.80	ACSR/CC	Amokabel CCSX62		
19/3.25	16.30	AL	Opal/Krypton/Neptune		
19/.128	16.30	AL	Hornet		
30/7/2.50	17.50	ACSR	Grape		
19/3.75	18.80	AL	Pluto/Neon		
19/.149	18.80	AL	Chafer		
30/7/3.00	21.00	ACSR	Lemon	ZCS1712 19-25mm OD	GGT001
19/.166	21.10	AL	Cockroach		
CCSX159	21.80	AAAC/CC	Amokabel CCSX159		
19/4.47	22.33	AL	Ruble		
19/4.75	23.80	AL	Taurus		
19/.183	23.80	AL	Butterfly		
30/7/3.50	24.5	AL	Lime		
37/3.75	26.30	AL	Triton	ZCS1713 25-32mm OD	GGT010
37/.144	26.30	AL	--		
54/7/3.00	27.00	ACSR	Mango		
61/3.25	29.30	AL	Uranus		
54/7/3.50	31.50	ACSR	Olive		

Important Note: Ensure fitting instructions are followed and always apply the recommended Steel Band for maximum grip of the conductor