



Cutters, Hand Operated up to 40mm



HC-20A



REL-58MC



HC-40A



Protective Carry Case (Included)

- Two stage double acting hydraulics
- Ram extends on both open & closed operation
- Manual pressure release at any stage
- Flip top latch head
- Replaceable blades

Cuts
AL/CU/ACSR


Part No.	HC-20A	REL-58MC	HC-40A
Brand/Manufacturer	TEN	Reliable	TEN
Head Rotation (°)	180	180	180
Cutting Force (T)	6.0	5.3	8.0
Safety Valve	Yes	Yes	Yes
Length (mm)	390	400	560
	Maximum Cutting Capacity OD (mm)		
Cu / Al	20	25	40
ACSR	20	25	28
Wire Rope	16	25	22
Standard Guy Wire	16	22	15
ReBar, Ground & Anchor Rods	13	16	13
Soft Steel Bolts	16	16	13
Specific Features	Double Stage Hydraulic design	Auto-Retract, No Disassembly to Replace Moving Blade	Double Stage Hydraulic design
Storage Supplied	Carry Bag	Carry Bag	Carry Bag
Weight (kg)	2.8	1.8	6.0

Klauke®

Cutters, Remote Head up to 105mm



SDG105C

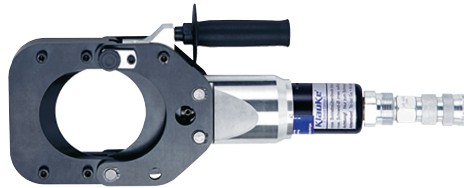

SDG852C




HC-40A



Canvas carry bag (Included)



SDG45C

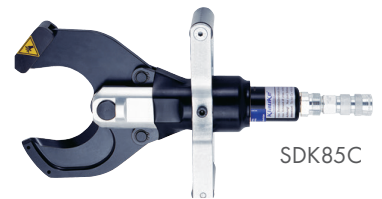

SDK85C

Part No.	SDG105C	SDG852C	SDG45C	PK60UNVC	SDK85C
Type	AL/CU/SWA	AL/CU/SWA	ACSR/AL/CU	ACSR/AL/CU	AL/CU/SWA
Cutting Range (mm)	max. 105 OD	max. 85 OD	max. 45 OD	max. 40 OD	max. 85 OD
Cutting Force (T)	12	6	6	6	3
Operating Pressure (PSI)	10,000	10,000	10,000	10,000	10,000
Length (mm)	432	445	340	350	450
Weight (kg)	7.7	4.3	3.8	2.4	5.2